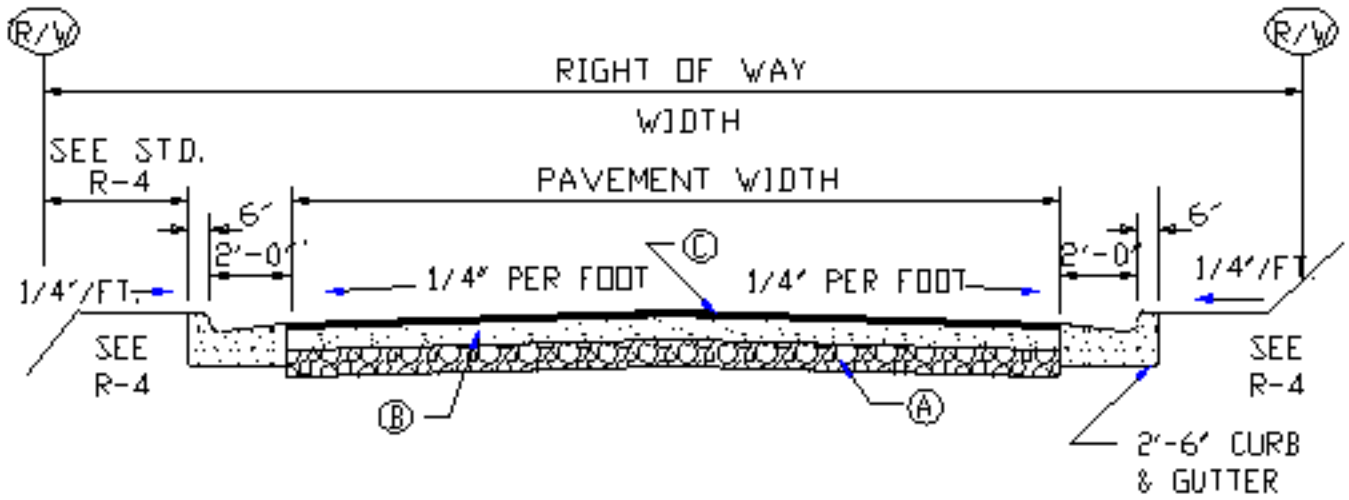

TYPICAL CROSS SECTION
MAJOR THOROUGHFARES, MINOR THOROUGHFARES,

MINIMUM PAVEMENT SCHEDULE

Ⓐ 12" COMPACTED AGGREGATE BASE COURSE OR 6" BITUMINOUS CONCRETE BASE COURSE HB.

Ⓑ 2" BITUMINOUS CONCRETE H-BINDER, PLACED IMMEDIATELY UPON FINAL PREPARATION OF ABC STONE BASE.

Ⓒ 2" BITUMINOUS CONCRETE SURFACE COURSE. TYPE I-2, PLACED IN ONE LIFT WITH TACK COAT BETWEEN BINDER AND SURFACE COURSE.

THE TYPE OF STREET IS TO BE DETERMINED BY THE CITY.

STREET TYPE	MINIMUM RIGHT OF WAY WIDTH (FEET)	MINIMUM PAVEMENT WIDTH* (FEET)
MAJOR THOROUGHFARE	80'	49'
MINOR THOROUGHFARE	60'	32'

*PAVEMENT WIDTHS DO NOT INCLUDE CURB & GUTTER

CITY OF SALISBURY, N.C. STANDARD DETAIL	DATE: JANUARY 1, 1991
ROADS	NOT TO SCALE
DESIGN STANDARDS (1)	STANDARD R-1