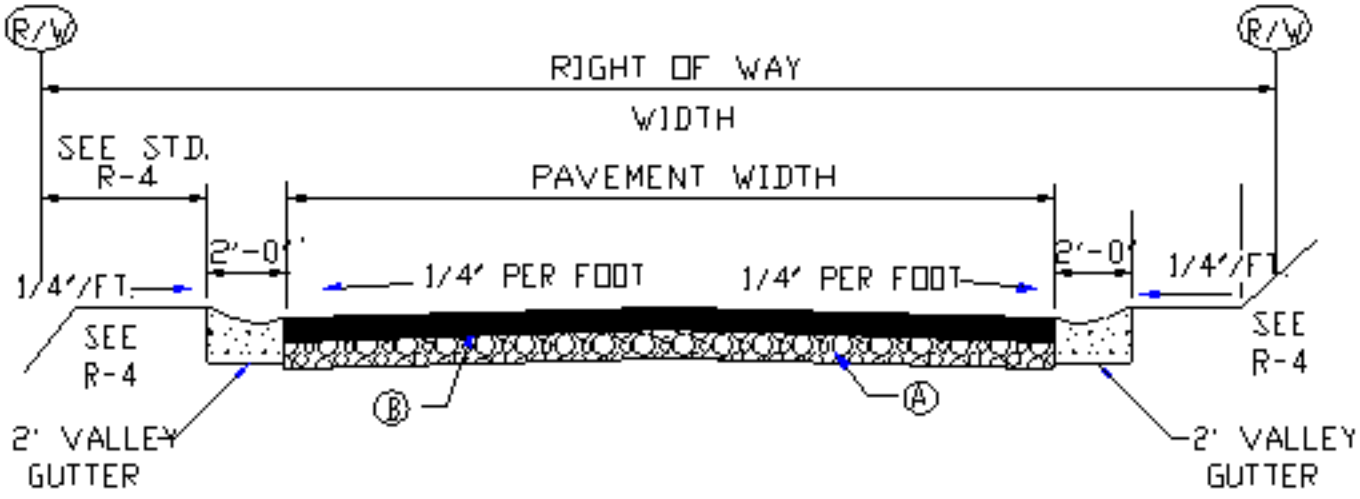

TYPICAL CROSS SECTION
RESIDENTIAL STREETS

MINIMUM PAVEMENT SCHEDULE

(A) 8" COMPACTED AGGREGATE BASE COURSE OR
4" BITUMINOUS CONCRETE BASE COURSE, TYPE HB

(B) 2" BITUMINOUS CONCRETE SURFACE COURSE.
TYPE 1-2 TO BE PLACED IMMEDIATELY UPON
FINAL PREPARATION OF BASE. .

NOTES

1. USE 2'-0" VALLEY GUTTER
2. TYPE OF STREET IS DETERMINED BY THE CITY.
3. FOR LOCAL COMMERCIAL AND INDUSTRIAL STREETS - SEE R-2

MINIMUM WIDTH OF PAVEMENT*	22'
MINIMUM WIDTH OF RIGHT OF WAY	50'

*PAVEMENT WIDTH DOES NOT INCLUDE CURB & GUTTER

CITY OF SALISBURY, N.C. STANDARD DETAIL	DATE: JANUARY 1, 1991
ROADS DESIGN STANDARDS (3)	NOT TO SCALE
	STANDARD R-3